

FIG. 2

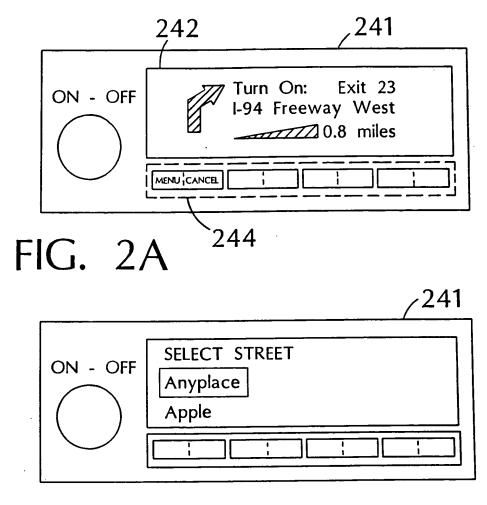


FIG. 2B

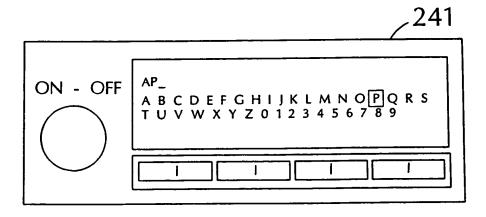
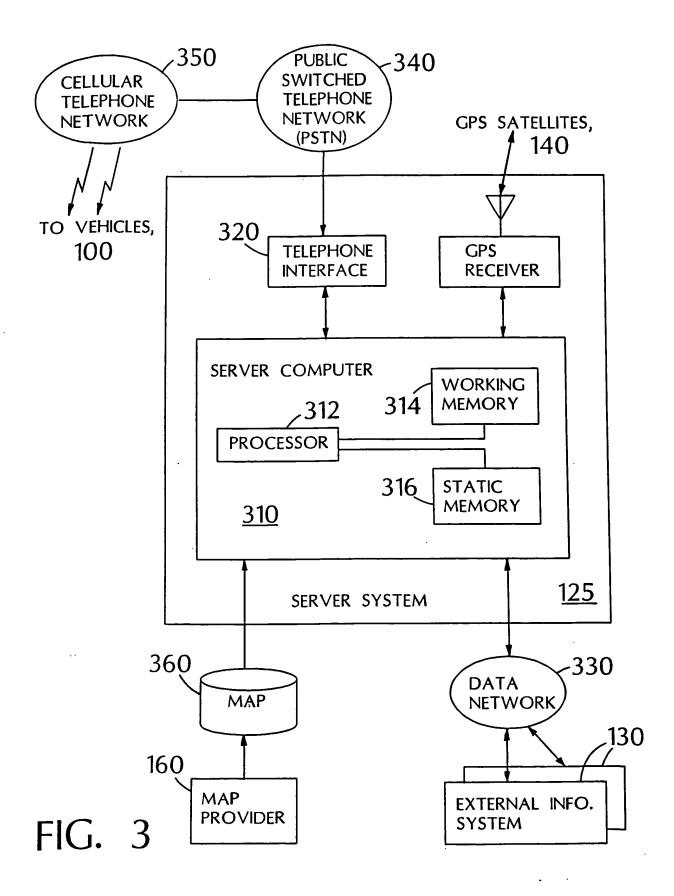


FIG. 2C



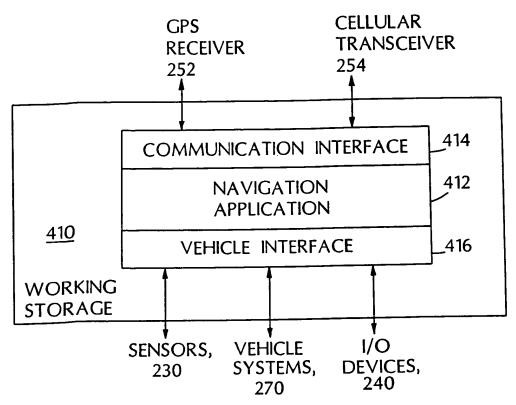


FIG. 4A

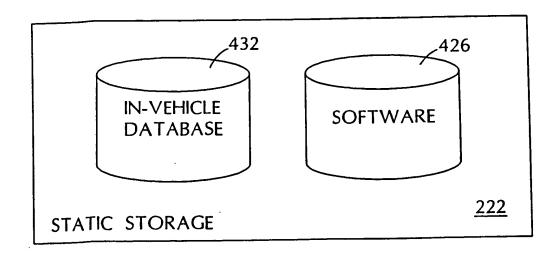
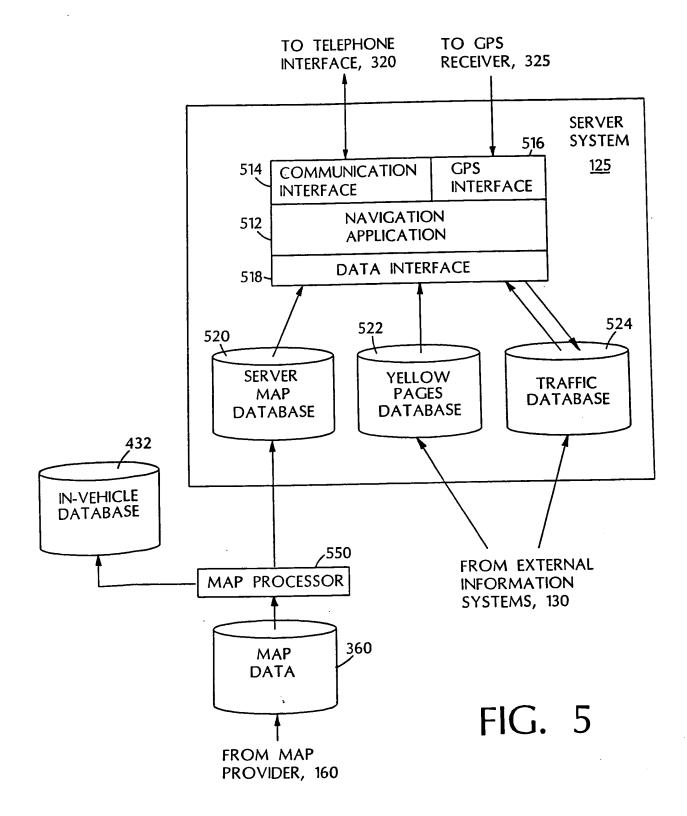
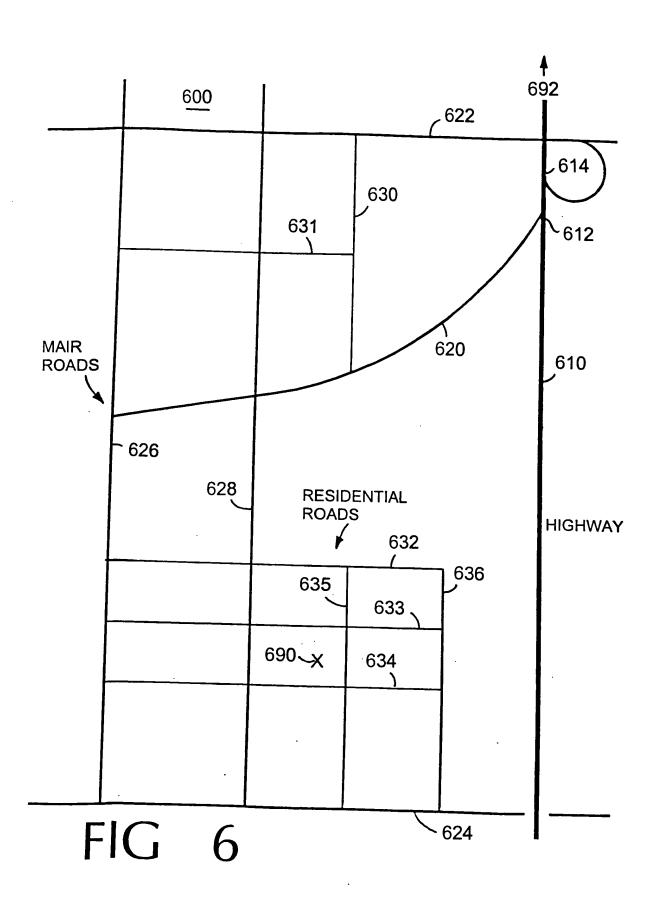


FIG. 4B







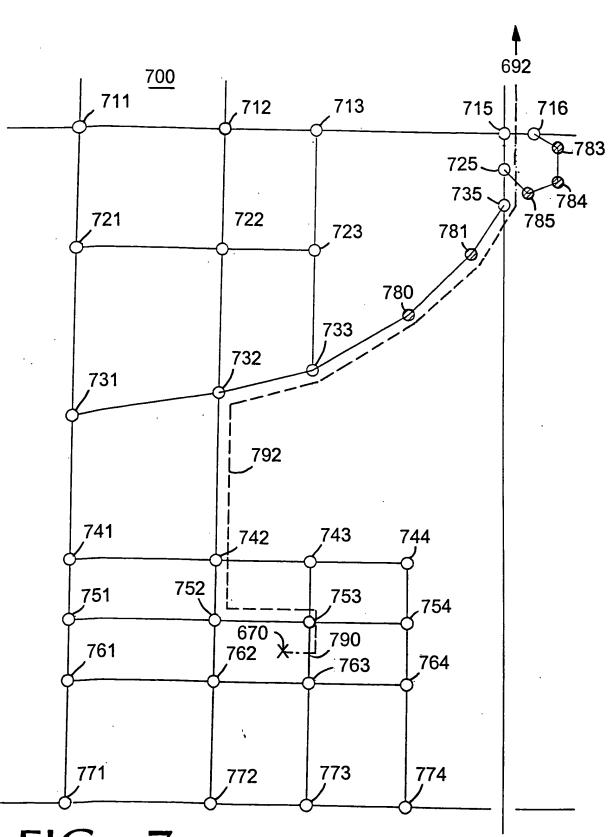


FIG. 7

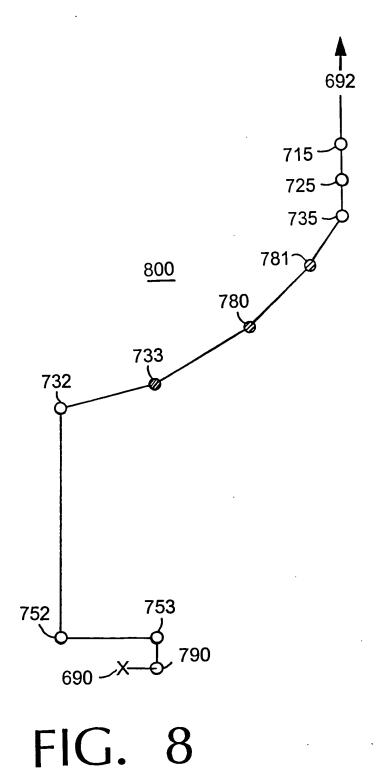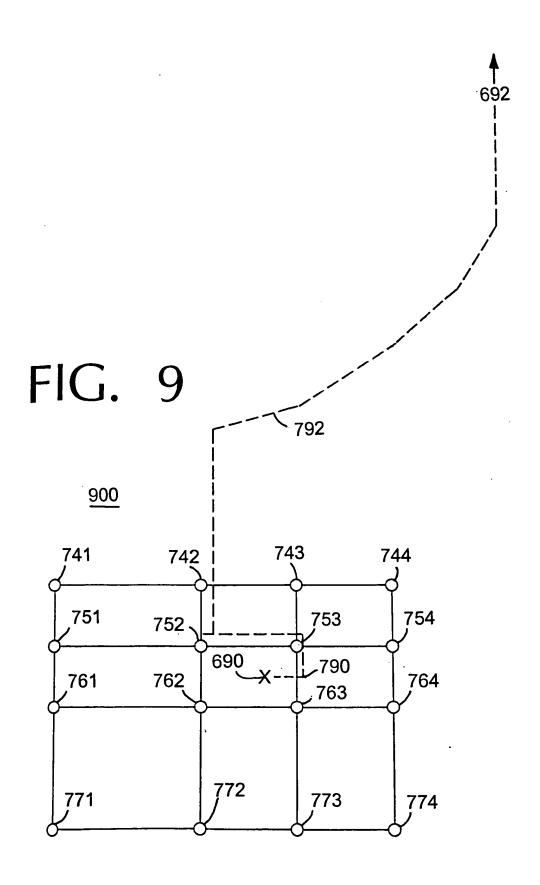

Matter No.: 2003P13043US / 09650-005009 Applicant(s): Ronald P. Knockeart et al.



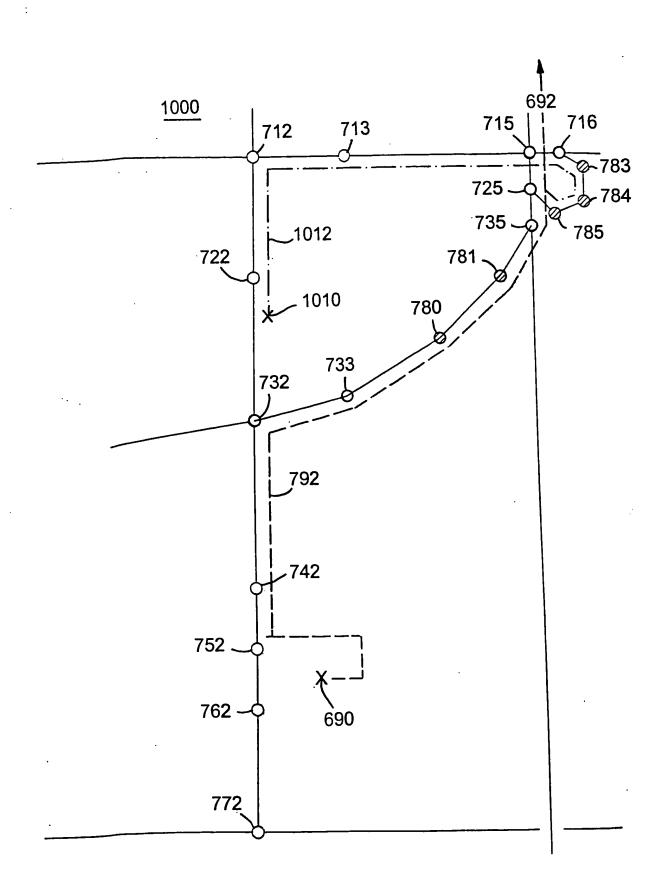
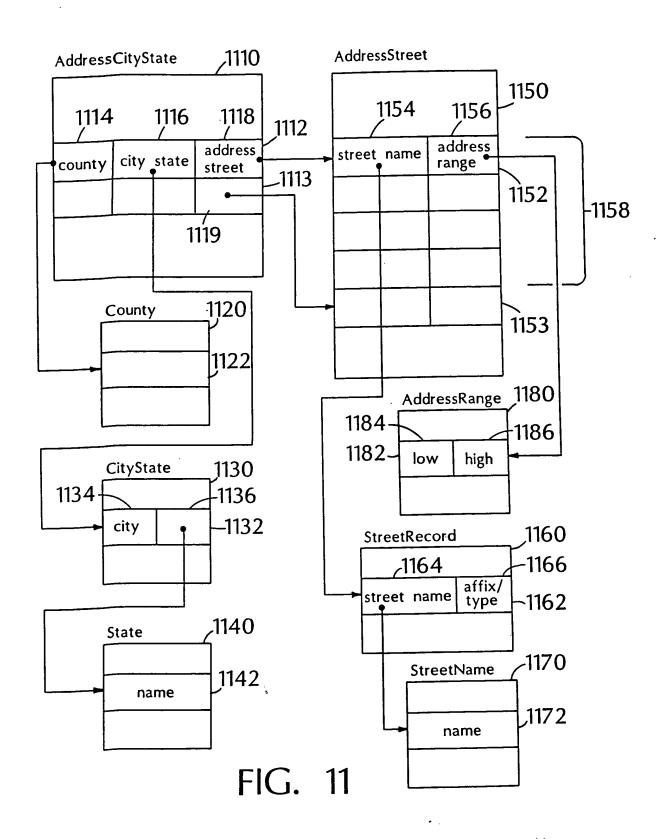


FIG 10

Matter No.: 2003P13043US / 09650-005009

Applicant(s): Ronald P. Knockeart et al.





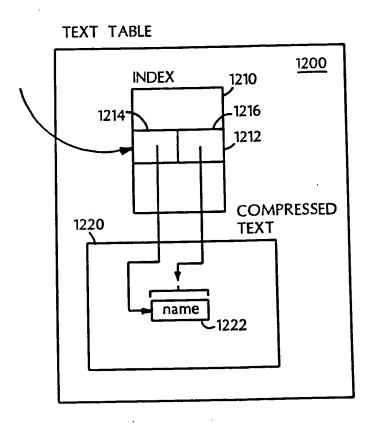


FIG. 12






FIG. 13A

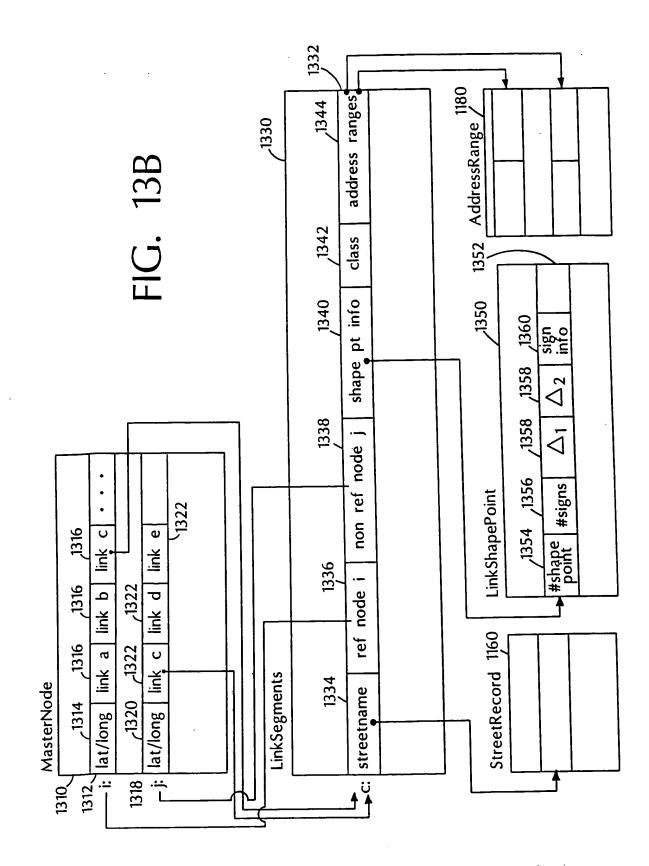

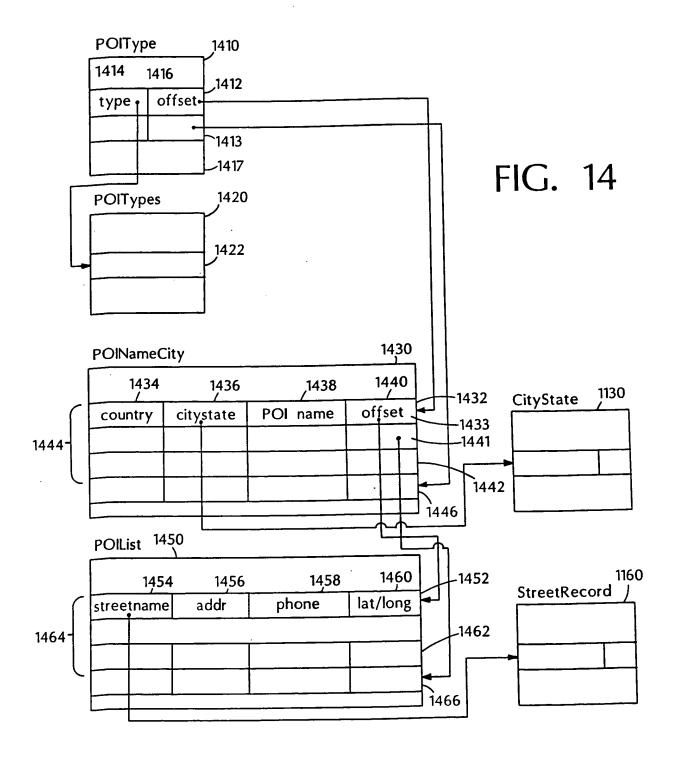

1501	Plan Route (In-Vehicle):
1502	Accept Destination Specification from Operator
1503	Determine Current Location Data
1504	Establish Communication Session with Server
150 <b>5</b>	Send Destination Specification and Current Location Data to Server
1506	IF Destination Specification Requires Server Interaction THEN
1507	Accept Secondary Destination Specification Data from Server
1508	Accept Secondary Destination Specification from Operator
1509	Send Secondary Destination Specification to Server
1510	END IF
1511	Wait for Server Response
1512	Receive Planned Route, Spot Map, and Differential GPS Data from Server
1513	Close Communication Session with Server

FIG. 15A

Plan Route (Server):
Accept Communication Session with Vehicle
Receive Destination Specification and Current Location Data from Vehicle
Determine DGPS Correction Data
Determine Vehicle Location
IF Destination Specification Requires Further Operator Input THEN
Determine Secondary Destination Specification Data
Send Secondary Destination Specification Data to Vehicle
Receive Secondary Destination Specification from Vehicle
END IF
Determine Planned Route to Specified Destination
Determine Spot Map near Vehicle Location
Send Planned Route, Spot Map, and DGPS Data to Vehicle
Close Communication Session with Vehicle

FIG. 15B

1601	Startup Maneuvers:
1602	Initialize Estimated Location using Differential GPS Data
1603	WHILE Estimated Location is not at a Point of the Planned Route DO
1604	Track Estimated Location using (D)GPS Data
16 <b>05</b>	Display Spot Map and Estimated Location on Display
160 <b>6</b>	END WHILE


## FIG. 16


1801	Replan Route:
1802	Estimate Vehicle Location of Main Roads Network using
1803	Dead-Reconing Location
1804	Calculate Best Route to a Maneuver or Way Point on the Previous
1805	Planned Route
1806	Replace Planned Route with Newly Calculated Route
1807	GOTO Follow Route


FIG. 18

1701	Follow Route:
1702	FOR Each Link on Planned Route DO
1703	At Initial Maneuver Initialize Off-Route Tolerance
1704	WHILE Vehicle Is Travelling to the Next Maneuver Point DO
1705	Increase Off-Route Tolerance
1706	Track Dead-Reckoning Location
1707	Track (D)GPS Location
1708	IF (Dead-Reckoning Location is more than Off-Route Tolerance
1709	from (D)GPS Location THEN
1710	GOTO Replan Route
1711	END IF
1712	IF Dead-Reckoning Location is within Maneuver
1713	Notification Window THEN
1714	Notify Operator of Next Maneuver
1715	END IF
1716	IF Dead-Reckoning Location is within Maneuver
1717	Detection Window THEN
1718	IF Next Maneuver is Detected THEN
1719	Update Dead-Reckoning Location
1720	Update DGPS Data
1721	END IF .
1722	END IF
1723	UNTIL Maneuver was Detected OR
1724	Vehicle Leaves Maneuver Detection Window
1725 ·	UNTIL Destination is Reached

## FIG. 17

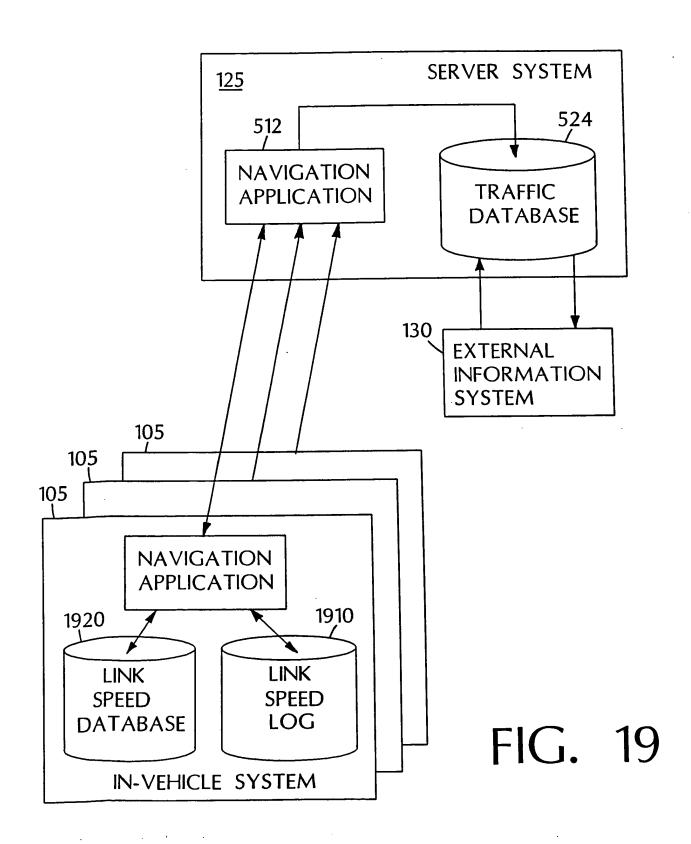

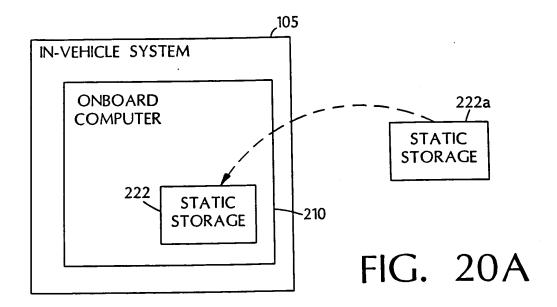

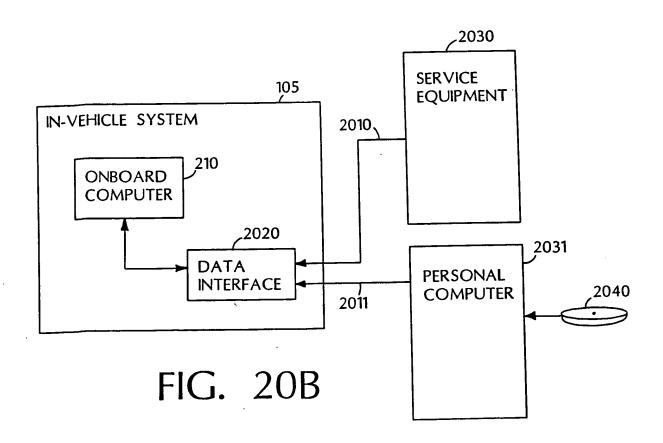

Matter No.: 2003P13043US / 09650-005009



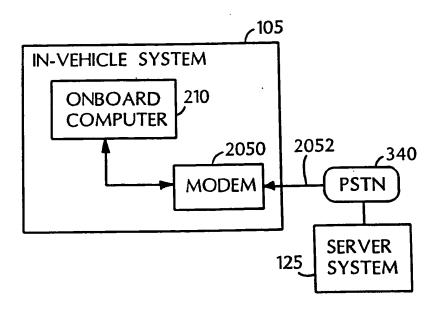


FIG. 20C

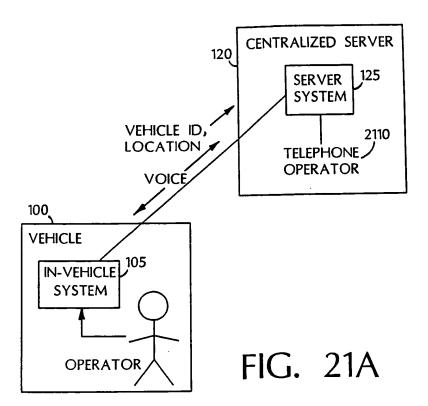

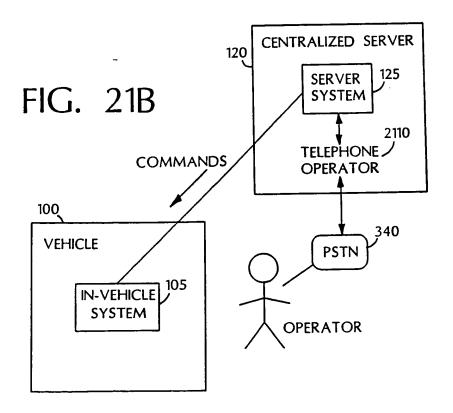

Matter No.: 2003P13043US / 09650-005009 Applicant(s): Ronald P. Knockeart et al.

VEHICLE INFORMATION SYSTEM

